




ER/LUX
CREATIVE QUALITY

SOLEIL
TEKSTILNA PERGOLA

ER/LUX
CREATIVE QUALITY



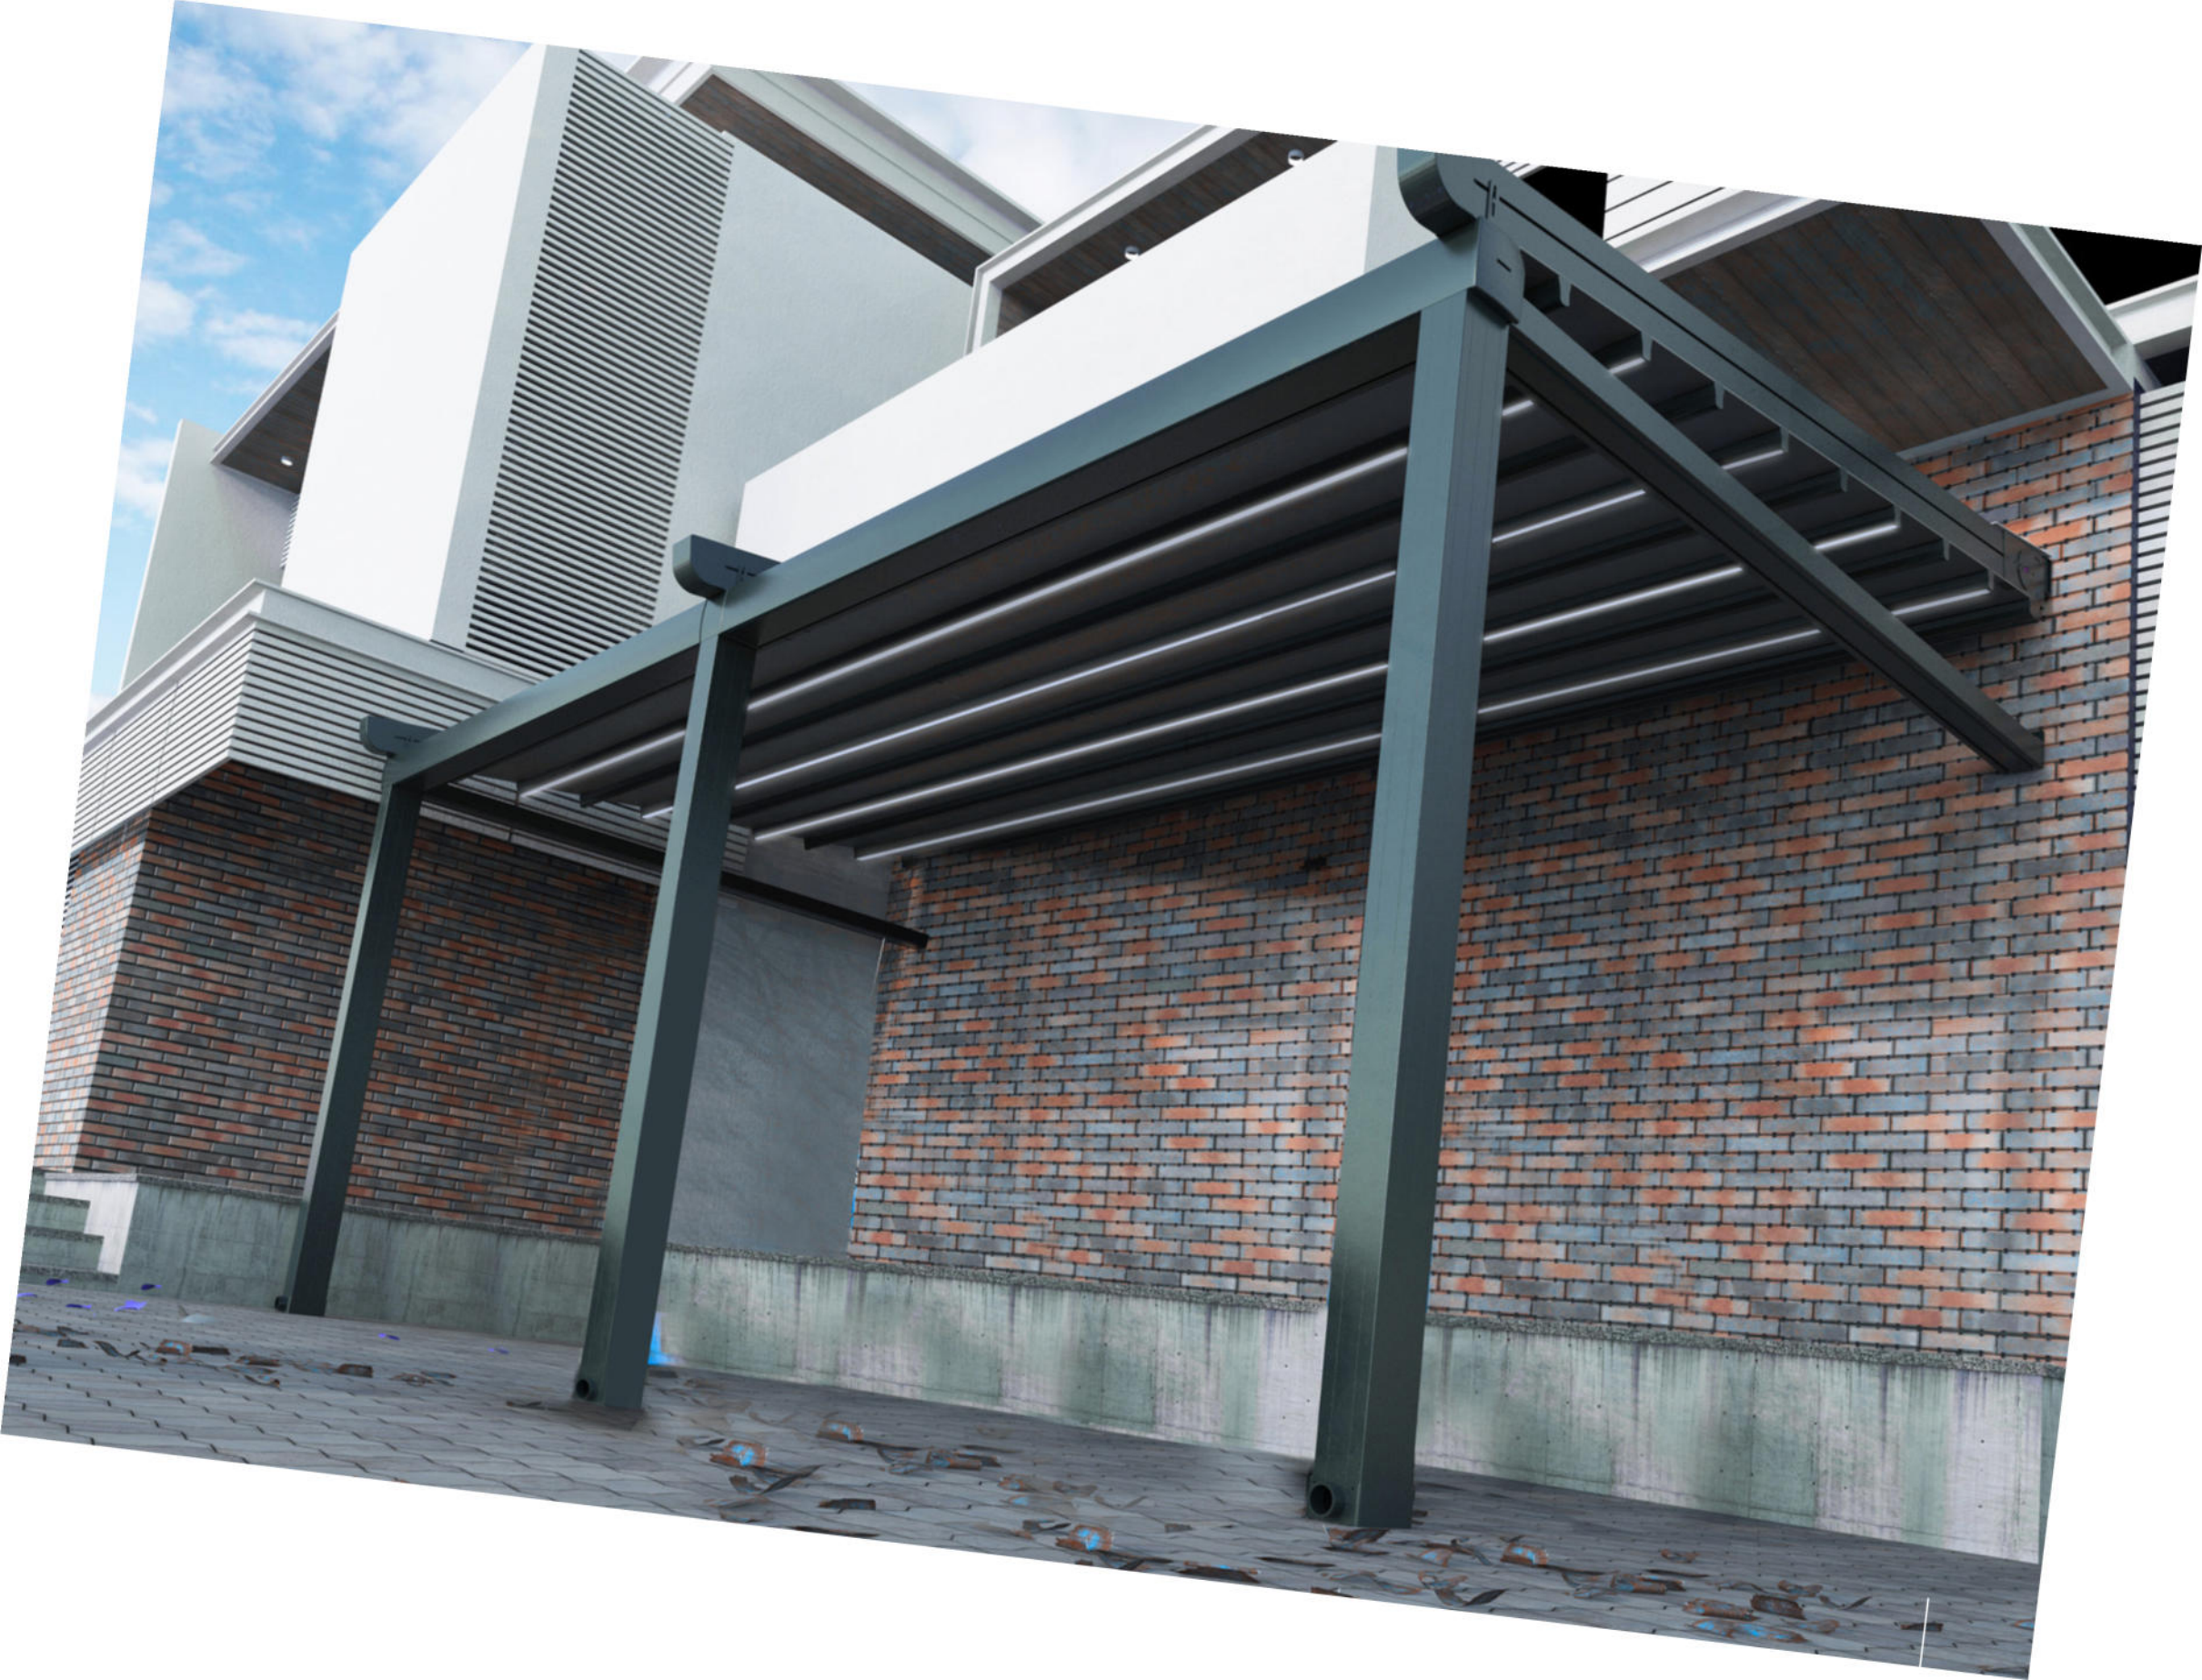




Prema RAL standardu, sve boje koje izaberete mogu se primeniti.
All the colors you choose according to the RAL color standard can be applied.


Izuzetno je otporno na vremenske uslove kao što su kiša i vetar.
It is extremely resistant to weather conditions such as rain and wind.

Materijali: aluminijum 6063 T5, nerđajući čelik i derlin.
Materials // 6063 T5 aluminum, stainless steel and derlin.

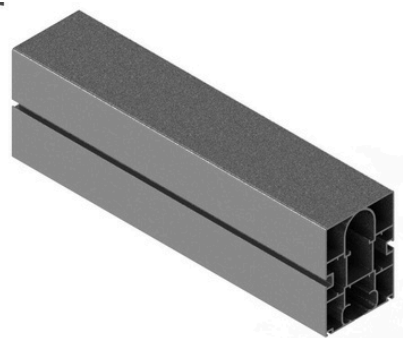



110x150 šina
110x150 Rail

(110x150x2,4mm)





110x150 šina
110x150 Rail

(110x150x2,4mm)

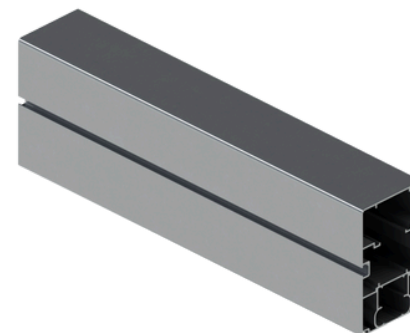


90x150 Srednja šina
90x150 Middle Rail

90x150x2,0mm

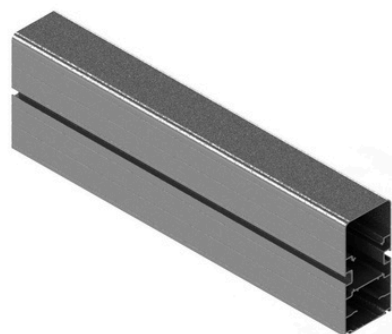



70x150 šina
70x150 Rail

(70x150x2,0mm)



Veliki oluk
Large Gutter

(152x150x2,2mm)

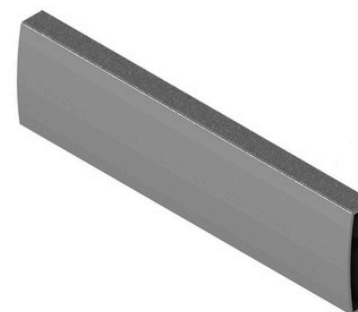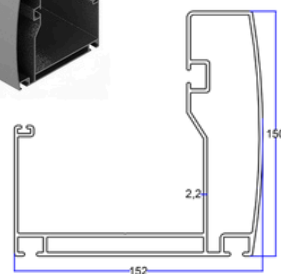

Povezani veliki oluk
Large Gutter Connected



(41x132x4mm)







Pravi oluk
Straight Gutter

(135x145x2,0mm)

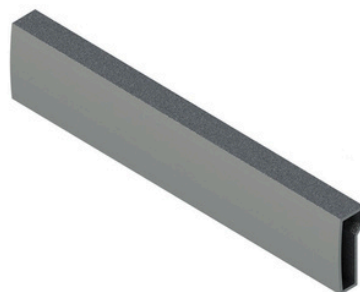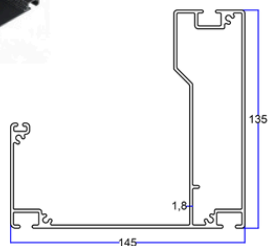



Povezani pravi oluk
Straight Gutter Connected

(39x96x4mm)

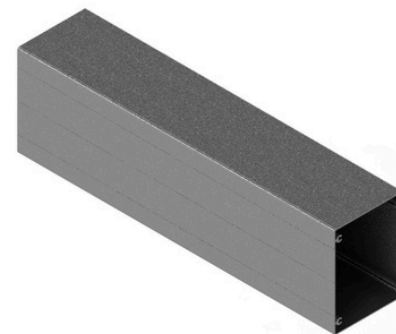


110x145 Stub
110x145 Column

(110x145x2,00mm)

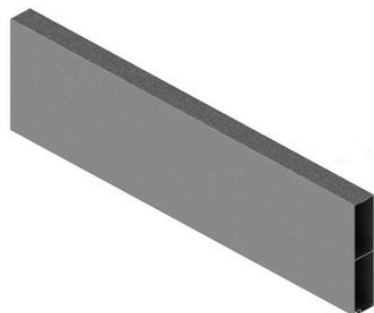



30x150 Profil između šina
30x150 Middle Profile

Product Code: 37181




Osovina
Pipe


(Ø75,5x1,5mm)

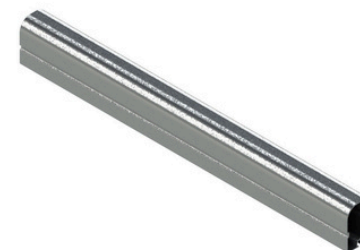

Tanki letva cornisa
Eco Cornice Wedge


(59x41x1,25mm)






Debeli ugao cornisa
Thick Cornice Wedge

(82x60x1,4mm)




Nova ugaona cornisa (Full LED)
New Cornice Wedge (Full LED)

(59,5x48,6x1,4mm)

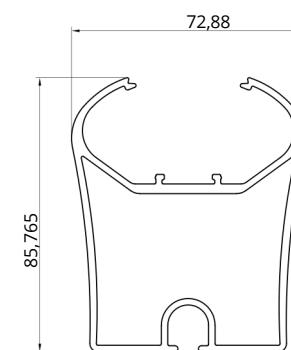

Nova ugaona cornisa (Full LED)
New Cornice Wedge (Full LED)

(57x48,6x1,4mm)

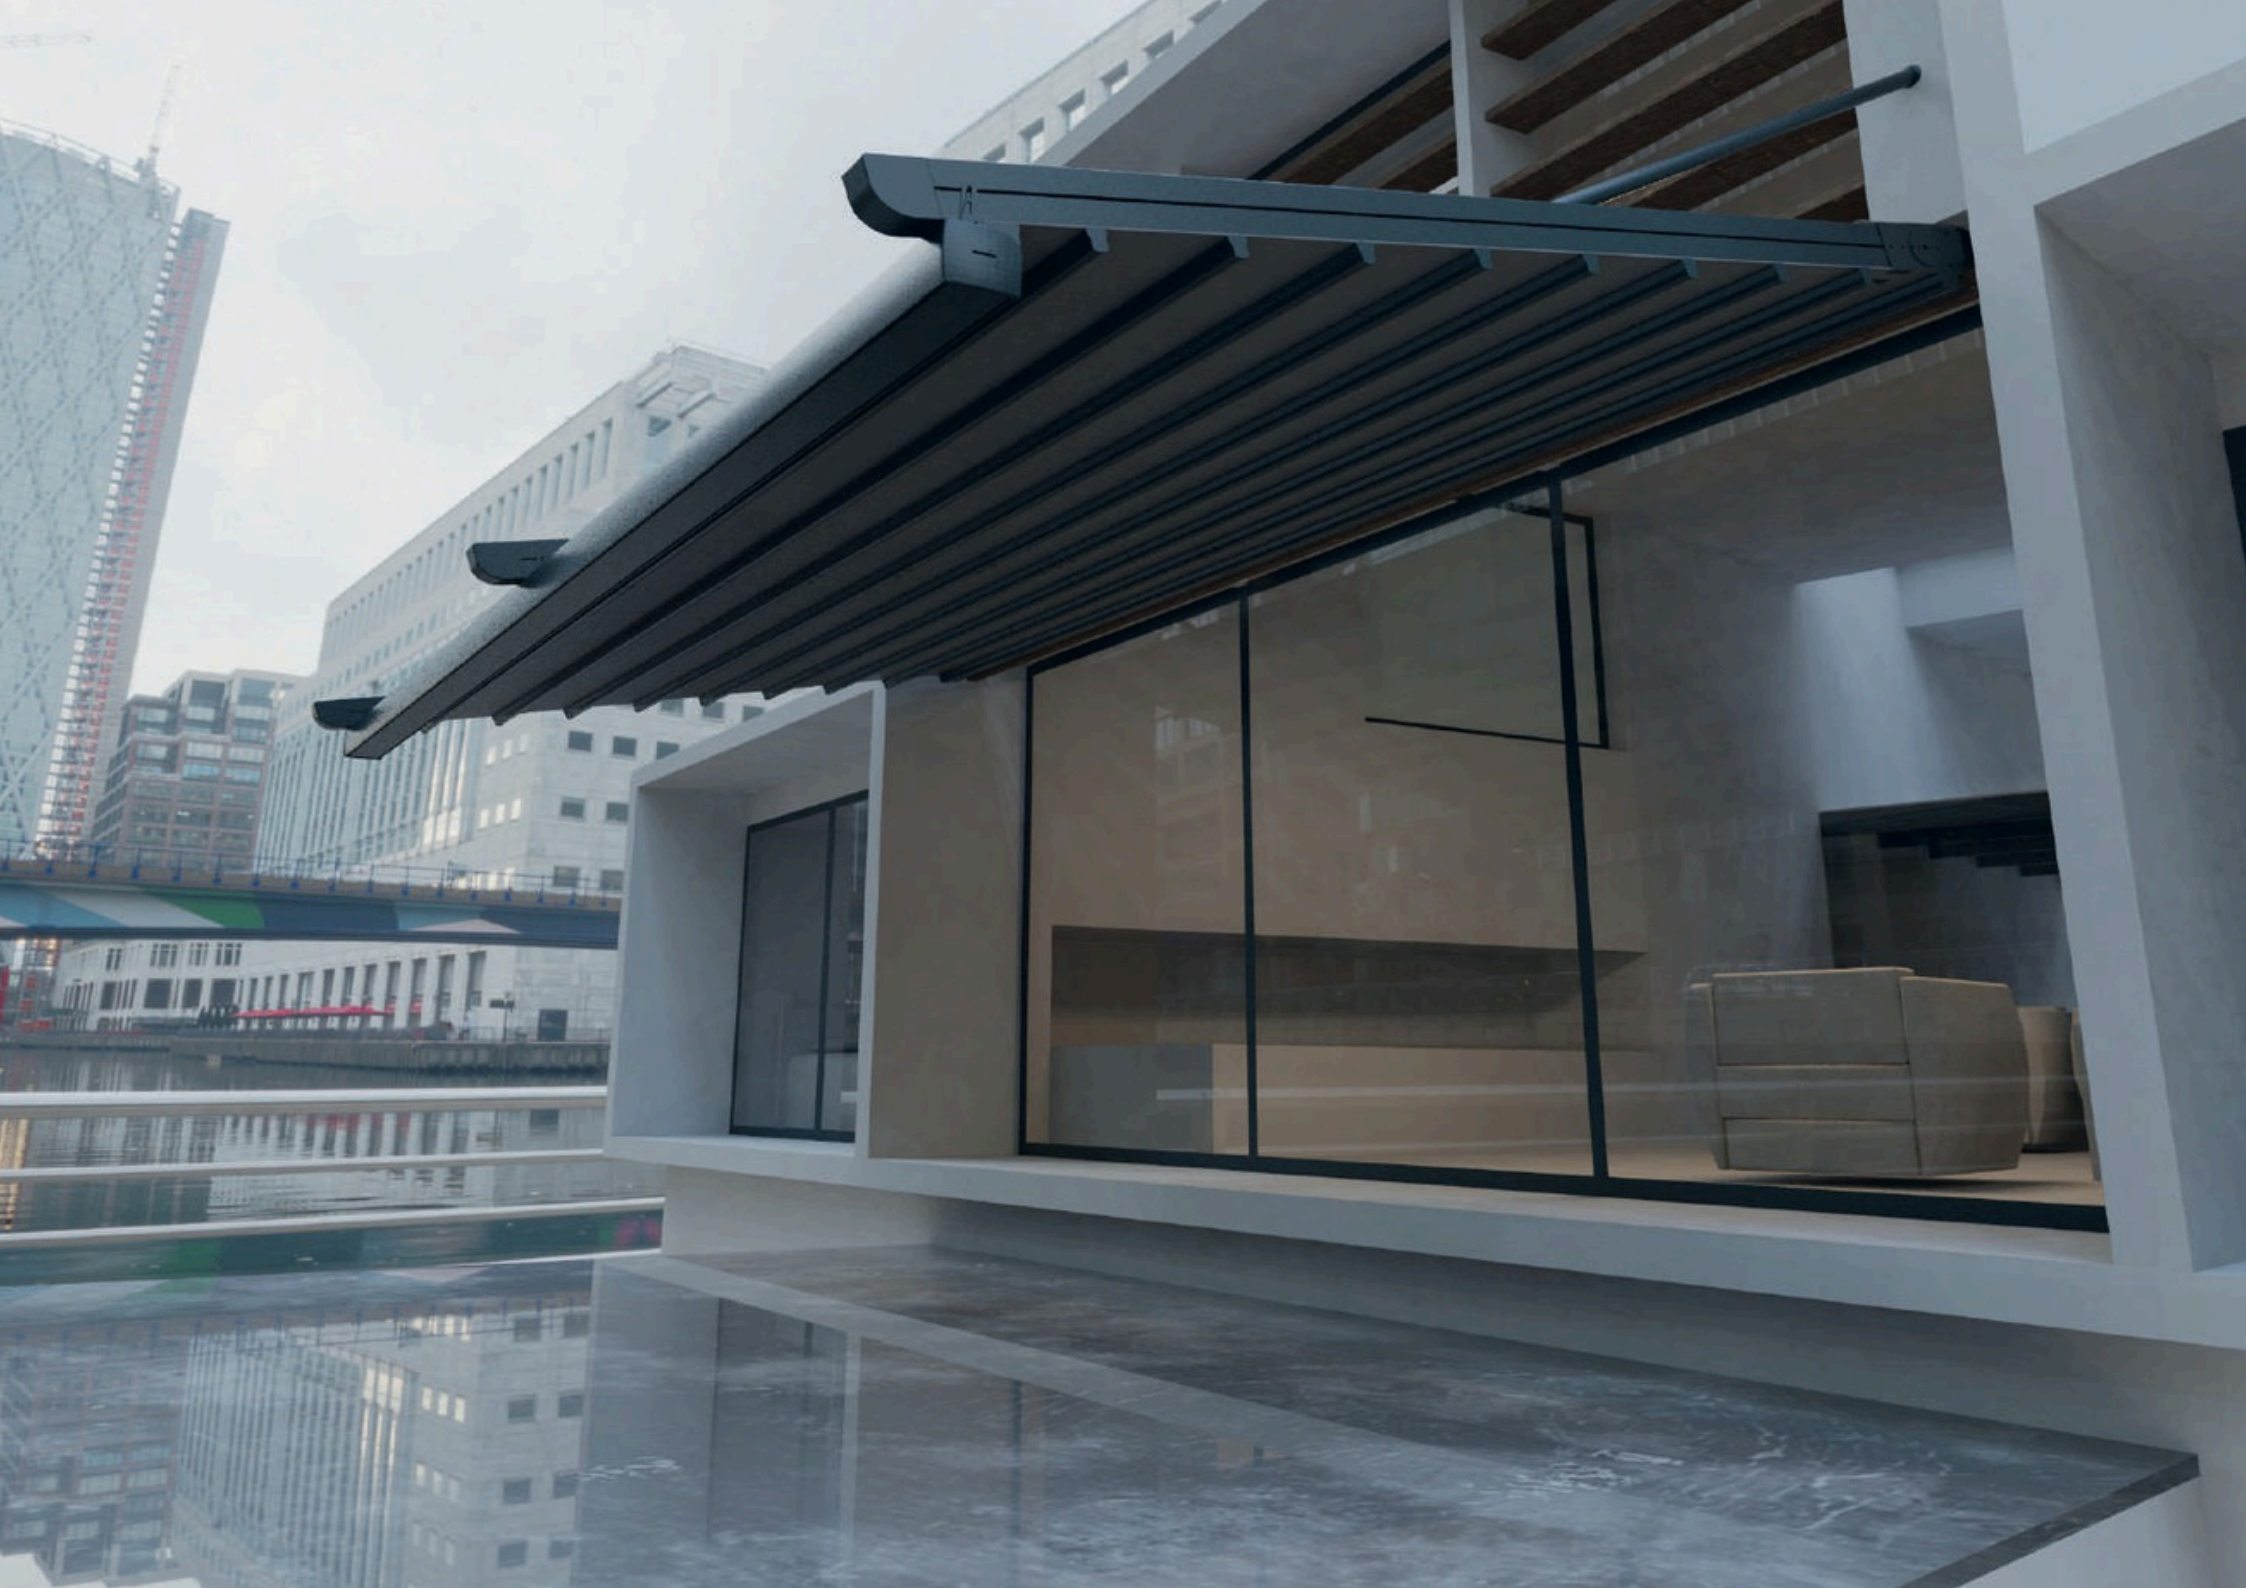



Test Code: 180512-01

TestDate: 2018-05-12

Tehničke informacije

Code: JD/RE-011

Product: Blackout

Test standard: FS5100, FS5134

Product	Unit	Standard	Test Result
Width	Cm	+/-0,5	300
Weight	g/m2	+/-20g/m	800
Tensile strength	N/5 cm	2	3210
Tensile strength	N/5 cm	2800	3026 409
Tear strength	N	2800 300	387
Tear strength	N	300	170
Adhesion	N/5 cm	100	
Fire retardant	FR		

ERALUX

CREATIVE QUALITY

ERALUX DOO BATOČINA
NJEGOŠEVA 14, BATOČINA / SERBIA



+381 60 163 6322

www.eralux.rs

