ERALUX
CREATIVE QUALITY

SOLIX

ZIP CURTAINS

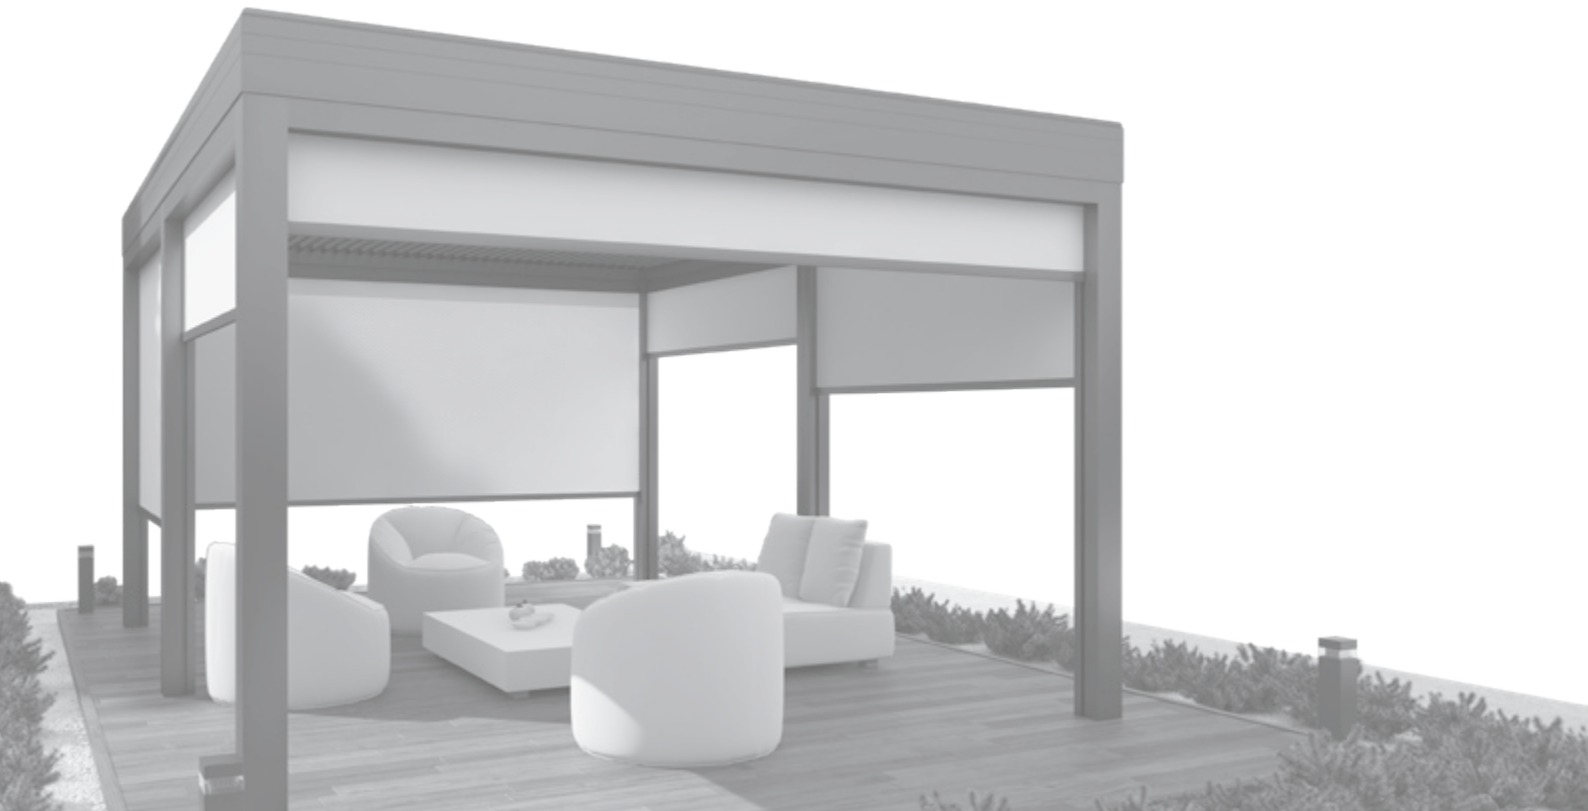

ERALUX
CREATIVE QUALITY

Our Automatic Zip Curtain System offers the perfect blend of style and functionality for both exterior and interior applications. Crafted from high-quality fabrics and advanced electronic components, this system is designed to provide seamless shading while enhancing the aesthetic appeal of any space.Ideal for windows, doors, open areas, and winter gardens, the zip curtains offer an effortless way to control light and privacy. The system operates smoothly, whether you're shielding your space from the sun or enjoying a more comfortable outdoor environment. With its sleek design and precise operation, it ensures that you can enjoy both pra

- It is resistant to wind
- It is resistant to seawater
- It protects against flies
- It prevents glare.
- It protects from the sun
- Provides temperature control
- Easy maintenance
- Production in desired size
- Energy savings
- 5-year high-quality guarantee

Fabric Collection

B-Cream

B-Grey

B-Black

B-Brown

B-White

B-Anthracite

TECHNICAL SPECIFICATIONS

Weight	380 g/m²
Tickness	0,45 mm
Width	177 - 267 cm
Tensile Strenght	230/160 DaN / 5 cm
Tear Strenght	45/20 DaN / 5 cm
Mold Growth Test	0 degrees, Perfect
Clarity	%14
Heat Resistance	-30 C / +70 C
Quality	ISO 9001
Environment	ISO 14001

UV Resistant

Inflammable

Serge Ferrari

Our fabrics, consisting of 3 layers, have properties such as WATER, AIR, LIGHT IMPERMEABILITY, FIRE RESISTANCE, and FLAME RETARDANT. This allows you to use them SAFELY in any environment

ERALUX
CREATIVE QUALITY

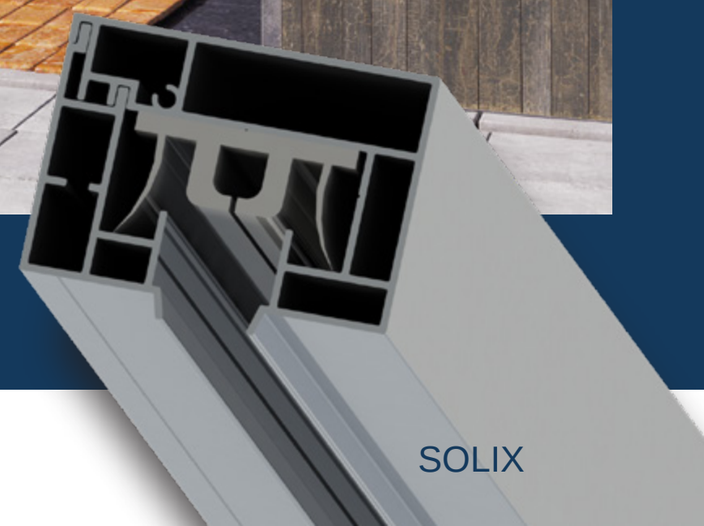

ZIP CURTAINS

SOLIX

Our Automation Systems

Sun Sensor

Wind Sensor

Remote Control Systems with iOS and Android Apps

Power is in your hands!

Solix Zip Curtain, with remote control systems available through iOS and Android apps, puts control in your hands. Whether from your remote or your phone, you can easily manage your zip curtain system anytime, anywhere. Additionally, thanks to the smart sun and wind sensors, you can automatically position your curtain

Technical Specifications

- Profiles made of aluminum injection connection parts, blockout fabric in different colors and patterns, and special rubber seals with heat and sound insulation
- Height measurement in the range of 1 m – 5.5 m Aluminum extrusion frame
- 40 Nm – 85 Nm remote-controlled tube motor
- Inox motor module connections Stainless INOX connectors and bolts
- Electrostatic RAL series powder coating Stainless Inox
- Width measurement in the range of 0.5 m – 6 m

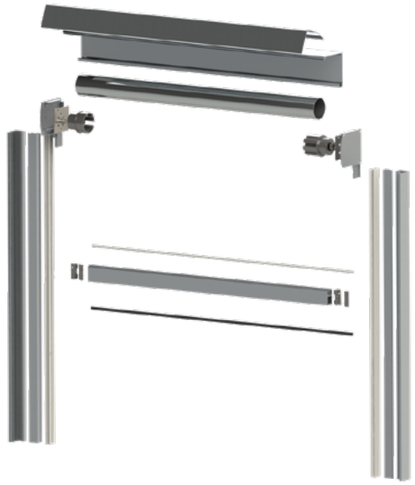

SOLIX

ERALUX
CREATIVE QUALITY

ERALUX DOO
Njegoševa 14, 34227
Batočina / Serbia **info@eralux.rs** / www.eralux.rs
+381601636322

ZIP CURTAINS