


ERALUX

CREATIVE QUALITY

TERMOGLIDE

NEW TERMO

Insulated Guillotine series



TERMOGLIDE

Previously, due to the difficulty in cleaning, vertical sliding systems that are commonly used were generally preferred in lower floors. However, with the development of new methods, the cleaning issue of the system has been solved. A newly designed system for areas like balconies, which offers a more comfortable cleaning experience even in high-floor residences, has been introduced. The system ensures both cleaning and ventilation of the environment by opening the lower and middle panels at a precise 22.5° angle. How the system works: Unlike typical glazing systems, the panels operate in an opening and closing motion through a motor connected to a chain and belt system, with vertical motion activated by an automation method. The motor moves the panels up and down through the commands of the system's control buttons. Taking into account the shortcomings of the commonly used vertical sliding systems, we have developed alternative series based on the intended usage. To achieve higher insulation in application areas, the Termoglide insulated thermal barrier profile sliding system and the Eralux Termoglide glass sliding system provide maximum insulation, creating more comfortable living spaces.






TERMOGLIDE

Prethodno, zbog poteškoća u čišćenju, vertikalni klizni sistemi koji se često koriste uglavnom su bili preferirani na nižim spratovima. Međutim, razvojem novih metoda, problem čišćenja sistema je rešen. Novi dizajnirani sistem za prostore kao što su balkoni, koji pruža udobnije iskustvo čišćenja čak i u stanovima na višim spratovima, je predstavljen. Sistem omogućava i čišćenje i ventilaciju prostora otvaranjem donjih i srednjih panela pod tačno 22,5° ugla. Kako sistem funkcioniše: Za razliku od tipičnih sistema sa staklenim panelima, paneli se pokreću u otvaranju i zatvaranju pomoću motora povezanim sa sistemom lanca i kaiša, pri čemu je vertikalno kretanje aktivirano automatskom metodom. Motor pomera panele gore i dole putem komandi sa kontrolnih dugmadi sistema. Uzimajući u obzir nedostatke uobičajenih vertikalnih kliznih sistema, razvili smo alternativne serije zasnovane na predviđenoj upotrebi. Da bi se postigla veća izolacija u primenama, Termoglide sistem sa izolovanim termalnim barijerama i Eralux Termoglide sistem sa staklenim kliznim panelima obezbeđuju maksimalnu izolaciju, stvarajući udobnije životne prostore.

Tehničke specifikacije


Aluminijumski profili	EN6063T4-F22 poliamidni uvozni barijera
Opcija boje profila	Elektrostatički prahom farbano, drveni premaz
Opcija stakla	24mm kombinovani termo staklo, 8mm kaljeno staklo
Opcije otvaranja sistema	Standardno se sakuplja dole, sistem se sakuplja gore, donji panel se otvara kao vasistas
Mehanizam	Mehanizam sa čeličnim lancom
Opcije motora	120-140nw Tubular motor Becker (200kg)/Mossel (180kg)/Cuppon (180kg)
kontrolisanim pokretima	Sa daljinskim upravljačem ili dugmadi
Sistem max. širina	Standardni sistem 4400mm, Sakuplja se gore 2500mm
Izolacija	UV dodatak vlaknasti cetskica, guma

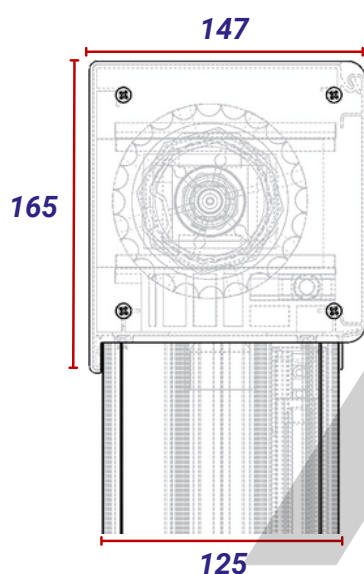


Technical specifications

Aluminum Profiles	EN6063T4-F22 polyamide import barrier
Profile color option	roll painted, wood veneer
Glass option	24mm combination insulating glass, 8mm tempered glass
System opening options	Standard roll down, System roll up, Bottom panel opening transom option
Carrier mechanism	Steel chain mechanism, Steel wire belt mechanism
Engine Options	120-140 nw tubular motor becker(200kg)/mossel(180kg)/cuppon(180)
Motor motion control	remote control or Pushbutton
System max. width	Standard system 4400mm, Upper assembled 2500mm
Insulation	UV Additive Bristle roving, gasket




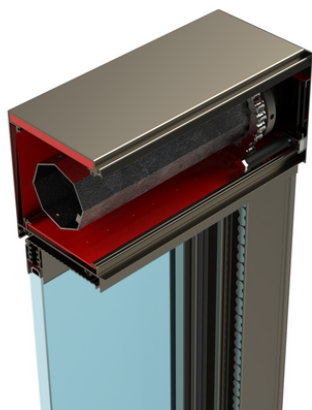


Izolovana kutija
Insulated box

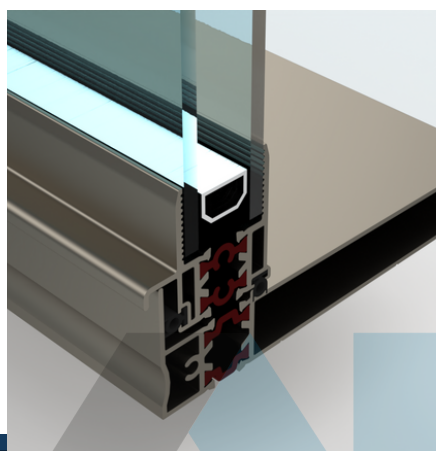


Detalj donjeg dela sa izolacijom
Bottom case detail with barrier

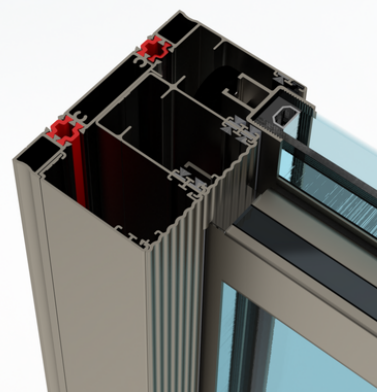


Detalj izolovanog bočnog okvira
Side frame detail with barrier

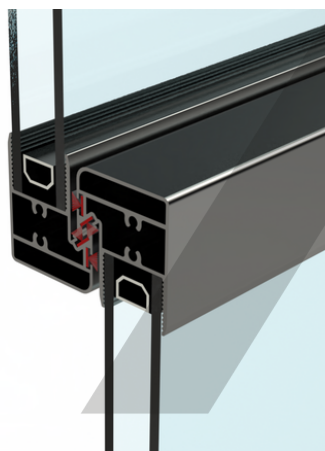


Izolovani spoj sa stegom
Clamp joint

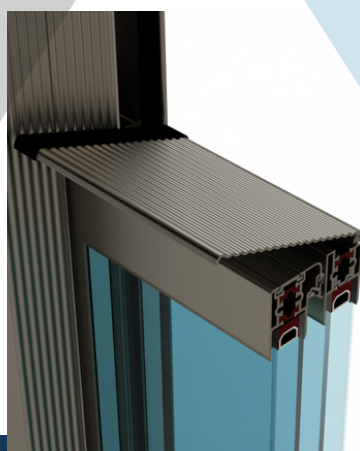

Pomerni gornji rukohvatmovable
top panel

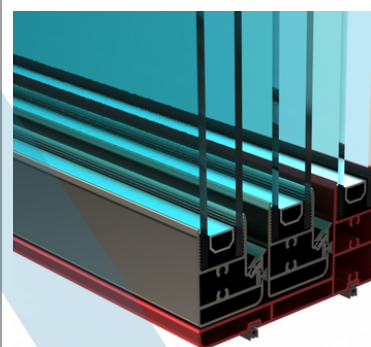

Detalj profila sakupljenog prema gore
Profile detail collected upwards



Aluminijumska
površina
aluminum
surface



Opcija
boje
Colour
option



Panoramski
pogled
panoramic
view



4 sezone
4 season



2 godine
garancije
2 year
warranty



Proizvodi
visokog
kvaliteta
High quality
products



Ekološki
prihvatljivo
Environmentally
friendly







ERALUX DOO

Njegoševa 24, 34227 Batočina Serbia



+381 60 1636 322

www.eralux.rs

