


ERALUX

CREATIVE QUALITY

FLEXORA

Seriya kliznih sistema sa gornjim kačenjem
Top Hanging sliding series



FLEXORA

Nova generacija FLEXORA gornje kačene klizne serije; To je serija dizajnirana za upotrebu u terasama, zimskim vrtovima, restoranima, kancelarijama i pregradama, sa maksimalnim prostorom za prolaz u sistemima kliznih vrata, poznata po lakoći upotrebe. Sistem funkcioniše pomeranjem u gornjem okviru sa specijalno dizajniranim nosivim ležajem pričvršćenim za panele. Posebno, otvaranjem panela prema unutra kao vrata nakon otvaranja, omogućava se nesmetan prolaz korišćenjem profila u uskim i širokim prostorima. Sa novodizajniranim poliamidnim barijernim profilima, sprečava se znojenje aluminijuma u nepovoljnim vremenskim uslovima, a obezbeđuje se dodatna izolacija. U zavisnosti od predviđene upotrebe sistema, može se primeniti bez praga ili sa pragom na nuli.




New generation FLEXORA top hanging sliding series; It is a series designed for use in terraces, winter gardens, restaurants, offices and partitions with maximum passage area in sliding systems known for their ease of use. The system works by moving in the upper rail profile with a specially designed carrier bearing attached to the panels. Particularly by opening the panels inwards like a door after opening, an unobstructed passage area is provided with the use of profiles in narrow and wide areas. With the newly designed polyamide barrier profiles, aluminum sweating is prevented in adverse weather conditions and extra insulation is provided. Depending on the intended use of the system, it can be applied without threshold or as zero threshold.




Teknik özellikler


Aluminiyumski profili	EN6063 T4
Opcija boje profila	Elektrostatički prahom farbano, drveni premaz
Opcija stakla	22mm kaljeno termo staklo
Nosivi ležaj	Delrin premazani 608 ZZ ležaj
Maksimalna visina	2500mm
Širina panela	550-800mm
Opcije sistema	Sa 4 šine, sa 3 šine
Izolacija	UV dodatak vlaknasti cetskica, gumo

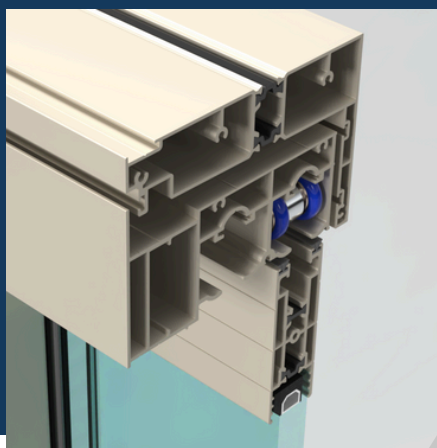

Detalj gornjeg dela
Upper case detail

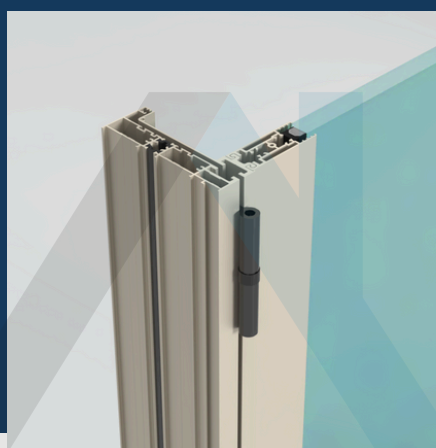

Detalj kliznih vrata
Sliding Door detail

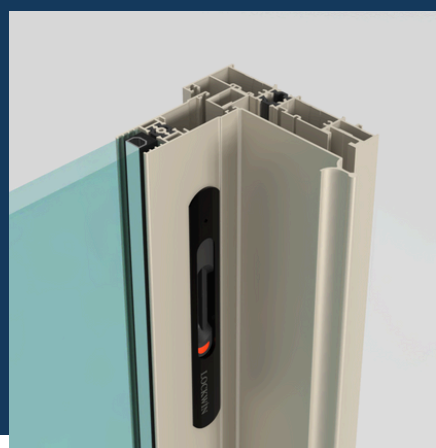

Detalj završnog profila
Finish profile detail

Technical specifications

Aluminum Profiles	EN6063 T4
Profile color option	roll painted, wood veneer
Glass option	22mm tempered insulating glass
Carrier bearing	Delrin coated 608zz bearing
Maximum height	2800 mm
Panel width	350-800mm
Insulation	UV Additive Bristle roving, gasket



ERALUX DOO

Njegoševa 24, 34227 Batočina Serbia

